



**OVERRIDE**<sup>®</sup>

ADVENTURE BAGS

# INSTALLATION INSTRUCTIONS

HARNESS SYSTEM  
ENDURO KIT WITH  
12, 16 AND 25L BAGS

Top/Side Bag 12L  
Top/Side Bag 16L  
Top Bag 25L





1 - We recommend covering all motorcycle surfaces that come into contact with the luggage harness with a clear protective adhesive film\*. The adhesive will prevent damage to the body panels.

2 - Centre the harness toward the rear of the seat, keeping the rectangular patch of Velcro in the middle (fig. A).



3 - Attach the rear fastening strap to the luggage rack or other anchor point on the motorcycle's rear fender (fig. B). This initial adjustment will define the correct location of the side bags.

4 - Tighten both lower fastening straps well so that there is no movement of the harness (fig. C).



Secure the lower side straps in a way that pulls the harness down and forward on the motorcycle. See arrows (fig. C).

This will ensure the harness conforms to the shape of the motorcycle, preventing excessive movement of the bags while riding.

**IMPORTANT TIPS!** ⚠


The harness must be positioned close to the rider without interfering while riding standing on your footpegs.

The closer the bags are to the rider, the lighter it feels while riding.

\*Adhesive film not included.




**MOUNTING THE HARNESS USING THE DOUBLE-D RINGS**

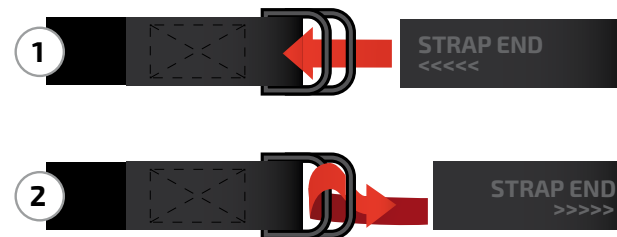

The straps adjustment system is similar to most helmets using Double-D rings. The strap is passed inside the two rings (fig. 1) and then returns passing under the lower ring (fig. 2).

These straps have a load test of 200Kg and can be tightened properly to conform to the motorcycle.

The Double-D can be used to tighten and loosen the strap. Lifting the handle attached to the upper D-ring in the opposite direction will loosen the strap (fig. D and E).

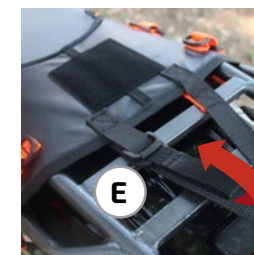


As this is a universal kit, some extra length may remain from the top and side fastening straps, which must be carefully tied down to prevent them from coming loose during riding.

If you prefer, you can cut the extra strap length once you've determined the ideal size needed for your motorcycle (leave a little bit of extra for loosening and removing the harness).


If cut, the straps need to be melted at the end to eliminate fraying. You can use a lighter to perform this step.

We don't recommend cutting the top strap, as it can serve as a shoulder strap to carry the whole luggage kit off the bike while travelling.




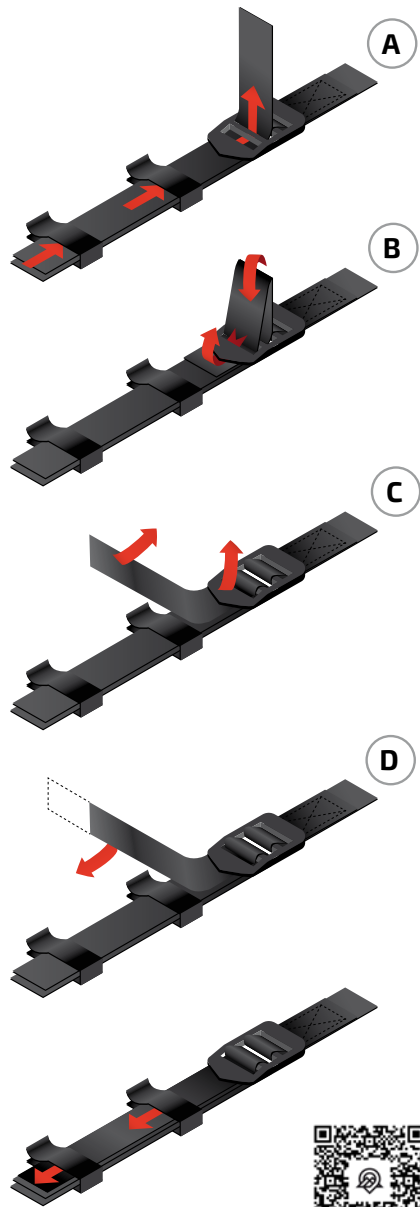


A

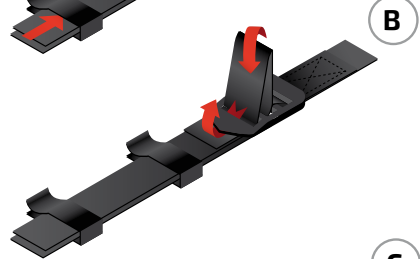

B

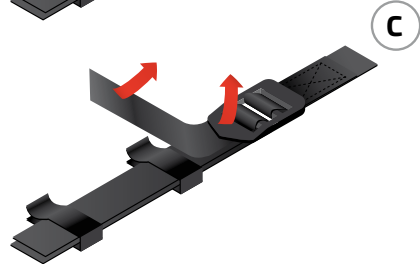

C

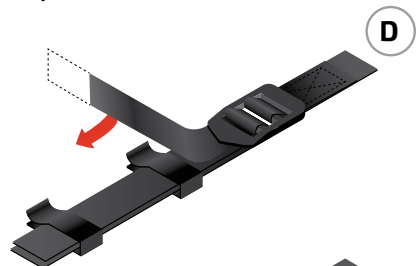

D



Use the QR Code with your smartphone to see the installation videos.

### Installation of the Side Bags (12 or 16L):

The bag can be held temporarily in place with the Velcro patch. Then, the bag's strap must be passed through the corresponding D-rings on the harness. Each strap returns to the adjustable buckles on the bag being secured.

Once a strap is passed through a D-ring, it must pass first through the strap-keepers on the way back to the adjustable buckles on the bag. Once the adjustable buckle is tightened, secure the free end of the straps with the strap-keepers (fig. A to D).

### Installation of the Top Bag (12, 16 and 25L):

**1-a. With the harness:** The bag is pre-attached using the Velcro patch. The bag's strap must be passed through one of the corresponding D-rings on the harness.

**1-b. With a rear rack only:** The bag straps must be passed through the structure of the rack offering a secure anchor point.

**2.** The D-rings are in pairs. Only one is needed to attach the top bag, leaving an extra attachment point to carry additional items on the harness.

Once a strap is passed through a D-ring or a secure anchor point, it must go through the strap-keepers a first time on the way back to the adjustable buckles on the bag. Once the adjustable buckle is tightened, secure the free end of the strap with the strap-keepers again (fig. A to D)

To tighten the strap, compress your load a bit, use a "ratcheting" movement: Lift the buckle first with the strap itself to loosen it, then pull down harder (fig. C and D).

Repeat until the bag is tight on the harness.



### How to Close Your Bags Properly:

The 12, 16 and 25L bags use roll-top openings. The end of the bag must be folded twice to ensure a waterproof closure.

The 12 and 16L bags can be adjusted down to fit your cargo better. Note that the 25L bag can be adjusted by rolling down both ends of the bag to fit the load you're carrying.

We suggest forming the "ears" and folding them over the rolled part rather than going on the side of the bag. Connect the quick buckle on top. Doing so helps compact the load even more efficiently, preventing items from moving inside the bag.



Use the QR Code with your smartphone to see the installation videos.





BAG-TOP-50\_CL



BAG-TOP-50\_CP



BAG-TOP-50\_CA



BAG-TOP-12



BAG-TOP-16



BAG-TOP-25



BAG-TOP-50\_PL



BAG-TOP-50\_PP



BAG-TOP-50\_PA



KIT-ENDURO-12\_24



KIT-ENDURO-12\_36



KIT-ENDURO-16-25\_57



FIXING STRAPS



KIT-ENDURO-12-25\_49



KIT-ENDURO-16\_32



KIT-ENDURO-16\_48

**SPIRIT OF EXTREME ADVENTURE.**

**OVERRIDE®**  
ADVENTURE BAGS





**OVERRIDE®**  
ADVENTURE BAGS

 [override.advbags](https://www.facebook.com/override.advbags)

 [override\\_advbags](https://www.instagram.com/override_advbags)

 [override adventure bags](https://www.youtube.com/override%20adventure%20bags)

[override.com.br](https://www.override.com.br)